



AUTOMATIC HOSE REELS VARNISHED FIXED FOR AIR-WATER 20 bar

Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



F-400

Article	Hose length	Ø hose	Inlet-outlet
070-1201-300	Without hose	-	F3/8" G - M3/8" G
070-1201-400	Without hose	-	M1/2" G - M1/2" G
070-1201-215	15 m	8x12	F3/8" G - M1/4" G swiv.
070-1201-220	20 m	8x12	F3/8" G - M1/4" G swiv.
070-1201-310	10 m	10x14	F3/8" G - M3/8" G
070-1201-315	15 m	10x14	F3/8" G - M3/8" G
070-1201-410	10 m	13x19	M1/2" G - M1/2" G




F-460

070-1301-400	Without hose	-	M1/2" G - M1/2" G
070-1301-320	20 m	10X14	M1/2" G - M3/8" G
070-1301-415	15 m	13X19	M1/2" G - M1/2" G
070-1301-418	18 m	13X19	M1/2" G - M1/2" G




F-550

070-1401-400	Without hose	-	M1/2" G - M1/2" G
070-1401-420	20 m	13X19	M1/2" G - M1/2" G
070-1401-425	25 m	13X19	M1/2" G - M1/2" G

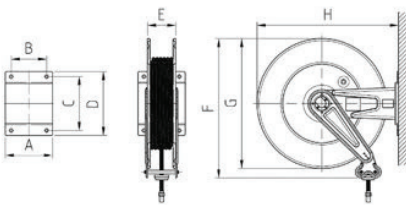


OVERALL DIMENSIONS FIXED


Mod.	A	B	C	D	E	F	G	H	Kg	m ³	N°
F-400	158	120	168	192	95	450	400	435	12,50<19,50	0,046	1
F-460	158	120	168	192	95	480	460	500	16,50<23,00	0,060	1
F-550	200	150	225	270	120	590	550	600	22,00<28,00	0,085	1




Wall application with
inside output hose



Wall application with
outside output hose



Wall and ceiling application
with frontal output hose



Application bench with
frontal output hose